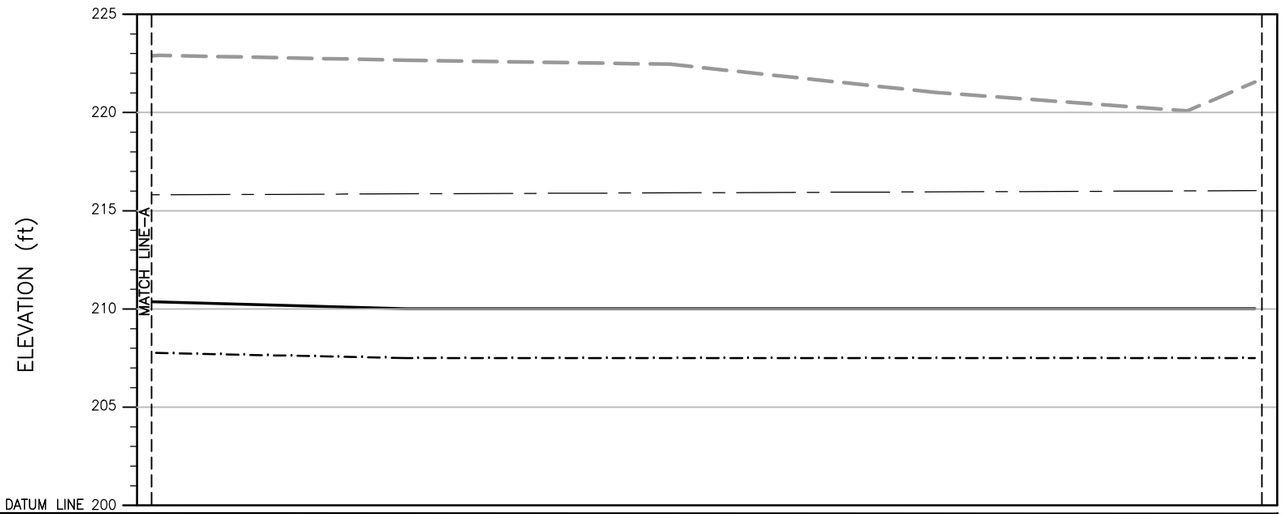


| | | | | | | | |
|---|---|---|---|---|---|---|---|
| H.F.L. (ft) | | | | | | | 215.55 |
| GL LAND SIDE (ft) | | 210.01 | | | | | 210.01 |
| GL RIVER SIDE (ft) | | 207.51 | | | | | 207.51 |
| ELEVATION (ft) | 222.91 | 222.67 | 222.46 | 221.03 | 220.08 | | 221.55 |
| DISTANCE (MILE/FURLONG) | 0/5 | 0/6 | 0/7 | 1/0 | 1/1 | | 1/2 |

**PROFILE**

LEGEND:

GL LAND SIDE

GL RIVER SIDE

ELEVATION

HIGH FLOOD LEVEL (H.F.L.)

0 4 10 FEET
VERTICAL SCALE

0 250 500 FEET
HORIZONTAL SCALE

NOTE:

1. (1 MILE = 8 FURLONG) AND (1 FURLONG = 660 FEET)
2. THE HFL HAS BEEN ESTIMATED BASED ON THE SINDH BUND MANUAL AND IS YET TO BE VALIDATED BY HISTORIC OBSERVATION.

**(SHEET 2 OF 2)**

CLIENT:

**IRRIGATION DEPARTMENT**
GOVERNMENT OF SINDH

**SINDH RESILIENCE PROJECT**
SINDH IRRIGATION DEPARTMENT

| REV. | DATE | DESCRIPTION | BY | CKD. | APPR. |
|---|---|---|---|---|---|
| | | | | | |

| | |
|---|---|
| DRAWN | AA |
| CHECKED | |
| RECOMMENDED | |
| APPROVED | |

**IRRIGATION DEPARTMENT**
**SECTION IV-A MILE 1-2 TO 0-0 FIRST DEFENCE LINE**
**LONGITUDINAL PROFILE**
DISTANCE 0/5 TO DISTANCE 1/2

| DATE | DWG. NO. | REV. |
|---|---|---|
| MARCH, 2023 | SRP/Section IV-A Mile 1-2 To 0-0/LP/02 | 0 |